


The SCS series is a family of high-bandwidth, high-speed response, and low-noise current sensor integrated chips for a wide range of applications including automotive, industrial, consumer, and communication systems, providing a high-speed, high-bandwidth integrated solution for current sensing in AC, DC, and inverter high-frequency switching power supplies. The chip family is available in a variety of output modes.

Features and Benefits:


- Open-loop current sensor using High-sensitivity Hall effect IC
- Single 3.3V supply
- Support unidirectional, bidirectional output, Bandwidth 600KHz, response time 0.8us
- Analog signal output
- Current detection range: $\pm 20A - \pm 75A$
- Operating temperature range: $-40^{\circ}C$ to $+125^{\circ}C$
- QVO (Zero current output):
 $-xR$: QVO ratiometric to supply voltage V_{CC} ,
 Fixed Gain $V_{QVO} = V_{CC} / 2$
- Differential Hall sensor, good accuracy, linearity and temperature drift
- Low internal resistance ($0.6\ m\Omega$) can effectively control heat consumption and power consumption
- Comply with AECQ100



Applications:


- EV/HEV charger and DC-DC power supply
- Photovoltaic inverter power supply and UPS
- Motor control and frequency converters
- Switching power supplies, communication and server power supplies

Pin Definition:

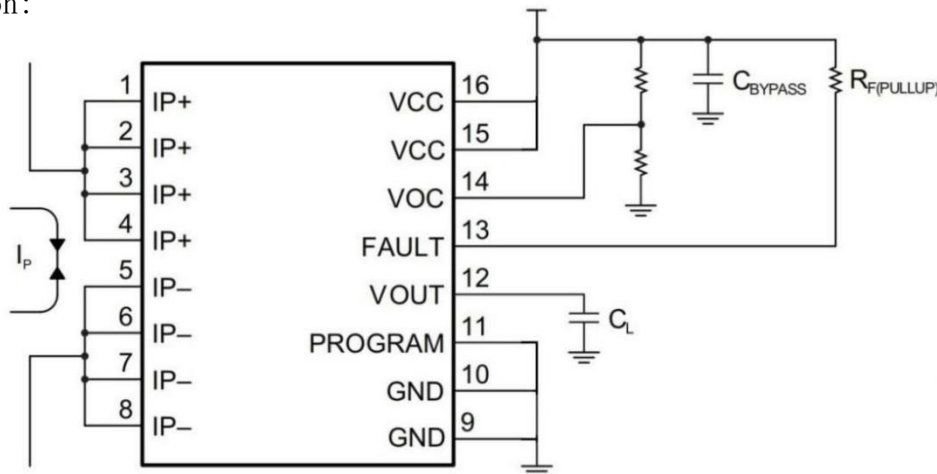

**Vcc BYPASS capacitor must be close to device Vcc pin*
**Vout BYPASS capacitor must be close to device Vout pin*

Naming rules:

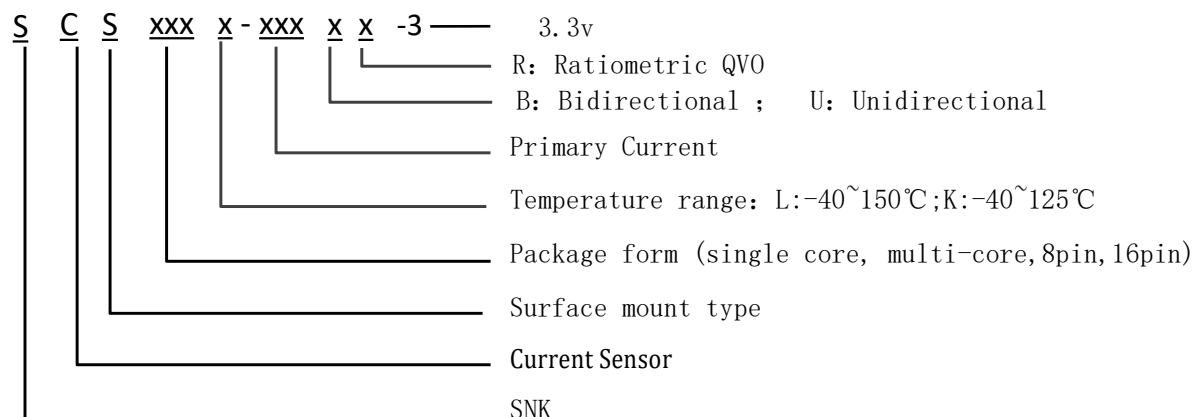

Ordering Information:

Part number	QVO VOUT (Q) (V)	Primary Current I _p (A)	Sensitivity Sens _(typ.) (mV/A)	T _A (°C)	MPQ (PCS)
SCS233K-020BR-3	V _{cc} /2	±20	66	-40~125	440
SCS233K-020UR-3	V _{cc} /10	20	132	-40~125	440
SCS233K-040BR-3	V _{cc} /2	±40	33	-40~125	440
SCS233K-040UR-3	V _{cc} /10	40	66	-40~125	440
SCS233K-065BR-3	V _{cc} /2	±65	20.3	-40~125	440
SCS233K-065UR-3	V _{cc} /10	65	40.6	-40~125	440
SCS233K-075BR-3	V _{cc} /2	±75	17.6	-40~125	440
SCS233K-075UR-3	V _{cc} /10	75	35.2	-40~125	440

*Please contact factory for currents other than standard current specifications

Absolute Maximum Ratings

Characteristic	Symbol	Rating	Unit
Supply Voltage	V_{CC}	-0.3 to 4.6	V
Supply Current	I_{CC}	20	mA
Output Voltage/ Reference voltage	V_{OUT}/V_{REF}	0.15 to $V_{CC}-0.15$	V
Output Current	I_{OUT}	± 40	mA
Operating Temperature	T_A	-40 to 125	$^{\circ}C$
Max Junction Temperature	T_J	165	$^{\circ}C$
Storage Temperature	T_S	-55 to 150	$^{\circ}C$

Common Operating Characteristics

Dc operating parameters at $V_{CC} = 3.3V$ (unless otherwise stated), T_A within the specified temperature range.


Parameter	Symbol	Condition	Min	Typ.	Max	Unit
Supply Voltage	V_{CC}		3.14	3.3	3.46	V
Supply Current	I_{CC}	$R_L \geq 10K\Omega$		16		mA
Power on Delay	T_{PO}	$T_A=25^{\circ}C$			1000	μs
QVO Ratiometric Error (-R)	E_r		-0.3		0.3	%
Zero Current Output Voltage	V_{QVO}	SCS-xxxBR-3	$T_A = 25^{\circ}C$	$V_{CC}/2$		V
		SCS-xxxUR-3		$V_{CC}/10$		
Output voltage Range @ I_P	$V_{OUT}-V_{QVO}$	SCS-xxxBR-3		± 1.32		
		SCS-xxxUR-3		2.64		
Output Load Resistance	R_L	V_{OUT} to V_{CC} or GND	5			$K\Omega$
Output Load Capacitance	C_L	V_{OUT} TO GND			10	nF
Response Time	$t_{RESPONSE}$	$T_A=25^{\circ}C$, $C_L=1nF$, I_P step=50% of I_{P+} , 90% input to 90% output		0.8		μs
Internal Bandwidth	BW	Small signal -3dB, $C_L=1nF$, $T_A=25^{\circ}C$		600		KHz
DC Output Impedance	R_{OUT}	$T_A = 25^{\circ}C$			20	$K\Omega$

ISOLATION CHARACTERISTICS

Characteristic	Symbol	Notes	Rating	Unit
Dielectric Strength Test Voltage	V_{ISO}	Agency type-tested for 60 seconds per UL standard 60950-1, 2nd Edition	3600	VAC
Working Voltage for Basic Isolation	V_{WFSI}	According to UL Standard 60950-1 2nd Edition, Basic (Single) Isolation	870	VDC or V_{pk}
			616	V_{rms}
Electrical distance	DCL	Minimum distance from IP pin to signal pin (air)	7.5	mm
Creepage distance	DCR	Minimum distance from IP pin to signal pin (plastic body)	7.5	mm

*1: 60-second test is only for UL test; Tested in production against UL60950-1 2nd Edition

Pin diagram

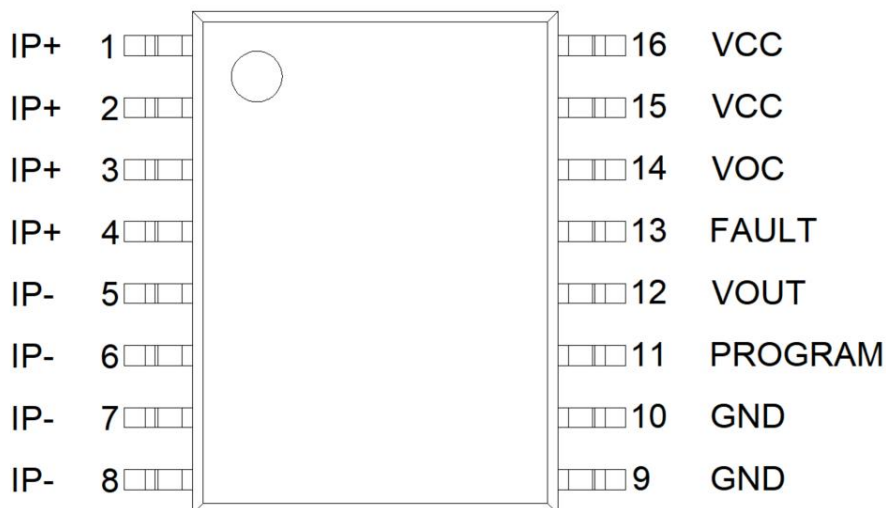

Pin number	name	description
1, 2, 3, 4	IP+	Positive terminals for current being sensed(enter)
5, 6, 7, 8	IP-	Negative terminals for current being sensed(out)
9, 10	GND	Ground terminal
11	PROGRAM	Factory calibrated feet (grounded recommended)
12	VOUT	Analog output
13	FAULT	Overcurrent fault output
14	VOC	Overcurrent fault threshold setting pin
15, 16	VCC	Power supply terminal

Overcurrent fault characteristics

Characteristic	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
FAULT Response Time	$t_{\text{RESPONSE(F)}}$	From $I_p > I_{\text{FAULT}}$ to FAULT, The time when the pin is pulled below V_{FAULT} ; The input current jumps from 0 to $1.2 \times I_{\text{FAULT}}$		0.8	1	μs
FAULT Range [3]	I_{FAULT}	Relative to I_{PR} full-scale; set via VOC pin	$0.5 \times I_{\text{PR}}$	-	$2 \times I_{\text{PR}}$	A
FAULT Output Low Voltage	V_{FAULT}	In fault condition; $R_{\text{F(PULLUP)}} = 5 \text{ k}\Omega$	-	0.07	0.4	V
FAULT Pull-Up Resistance	$R_{\text{F(PULLUP)}} = R_{\text{PU}}$		1	-	10	$\text{k}\Omega$
FAULT Leakage Current	$I_{\text{FAULT(LEAKAGE)}}$		-	± 5	-	μA
FAULT Hysteresis[1]	I_{HYST}	$V_{\text{CC}} = 5\text{V}$	-	6	-	%FS
		$V_{\text{CC}} = 3.3\text{V}$		9		
FAULT Error[2]	EFAULT	Tested at $V_{\text{VOC}} = 0.2 \times V_{\text{CC}}$ (I_{FAULT} threshold = $100\% \times I_{\text{PR}}$)	-	± 5	-	%
VOC Input Range	V_{VOC}		$0.1 \times V_{\text{CC}}$	-	$0.4 \times V_{\text{CC}}$	V
		$V_{\text{CC}} = 5\text{V}$	0.5		2	
		$V_{\text{CC}} = 3.3\text{V}$	0.33		1.32	
VOC Input Current	I_{VOC}		-	10	100	nA

[1] After V_{out} is higher than $V_{\text{out(FAULT)}}$, the internal comparator trips, V_{out} must be lower than $V_{\text{out(FAULT)}} - V_{\text{outHYST}}$, must be lower than.

[2] A failure error is defined as the value of the reported failure relative to the required threshold of $V_{\text{out(FAULT)}}$.

[3]

	Vvoc(V)		Fault Operation Point %FS
	Vcc=3.3V	Vcc=5V	
0.1xVcc	0.33	0.5	50%
0.15xVcc	0.466	0.75	75%
0.2xVcc	0.661	1	100%
0.25xVcc	0.826	1.25	125%
0.3xVcc	0.991	1.5	150%
0.35xVcc	1.156	1.75	175%
0.4xVcc	1.321	2	200%



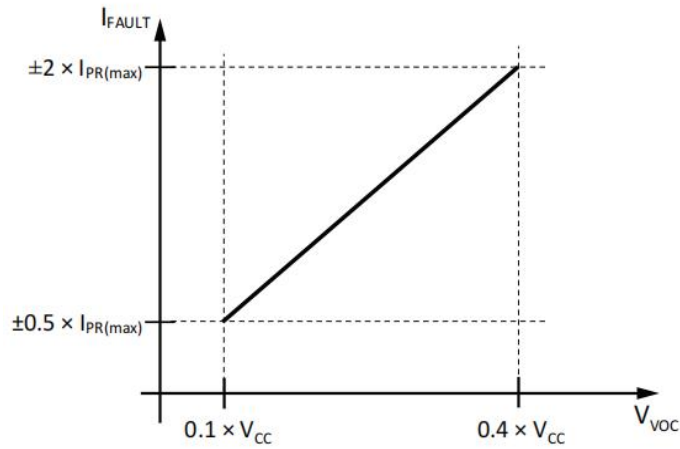


Figure 4: Fault Threshold vs. V_{VOC}

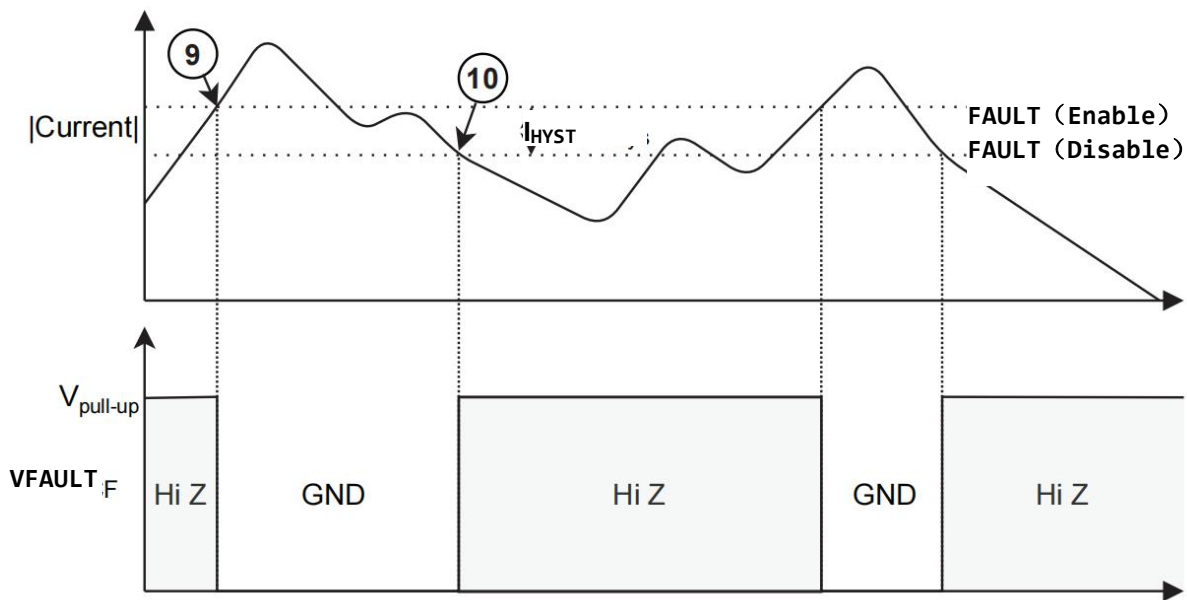

[4]The VOC can be connected to an external voltage source.



*020BR-3 Performance Characteristics

Dc operating parameters at VCC = 3.3V, TA = -40°C ~125°C, unless otherwise specified

Parameter	Symbol	Condition	Min	Typ.	Max	Unit
<i>Nominal parameters</i>						
Current Sensing Range	IP		-20		20	A
Sensitivity	SensTA	@VCC=3.3V		66		mV/A
Zero-current output voltage	VQVO	Ip=0A		Vcc/2		V
<i>Accuracy Performance</i>						
Sensitivity Error	ESens	@TA=25°C;VCC=3.3V	-1		1	%
Electrical Offset Error	VOE	IP=0A, TA=25°C	-10	±5	10	mV
		IP=0A, TA=-40°C ~125°C	-30	±15	30	mV
Linearity Error	LinERR	Of full rang	-1	0.5	1	%
Total Output Error	ETOT(HT)	Full scale of IP, TA=25°C~125°C	-2		2	%
	ETOT(HT)	Full scale of IP, TA=25°C~85°C	-1.5		1.5	%
	ETOT(LT)	Full scale of IP, TA=-40°C~25°C		±3		%

*020UR-3 Performance Characteristics

Dc operating parameters at VCC = 3.3V, TA = -40°C ~125°C, unless otherwise specified

Parameter	Symbol	Condition	Min	Typ.	Max	Unit
<i>Nominal parameters</i>						
Current Sensing Range	IP		0		20	A
Sensitivity	SensTA	@VCC=3.3V		132		mV/A
Zero-current output voltage	VQVO	Ip=0A		Vcc/10		V
<i>Accuracy Performance</i>						
Sensitivity Error	ESens	@TA=25°C;VCC=3.3V	-1		1	%
Electrical Offset Error	VOE	IP=0A, TA=25°C	-10	±5	10	mV
		IP=0A, TA=-40°C ~125°C	-30	±15	30	mV
Linearity Error	LinERR	Of full rang	-1	0.5	1	%
Total Output Error	ETOT(HT)	Full scale of IP, TA=25°C~125°C	-2		2	%
	ETOT(HT)	Full scale of IP, TA=25°C~85°C	-1.5		1.5	%
	ETOT(LT)	Full scale of IP, TA=-40°C~25°C		±3		%

***040BR-3 Performance Characteristics**

Dc operating parameters at VCC = 3.3V, TA = -40°C ~125°C, unless otherwise specified

Parameter	Symbol	Condition	Min	Typ.	Max	Unit
<i>Nominal parameters</i>						
Current Sensing Range	IP		-40		40	A
Sensitivity	SensTA	@VCC=3.3V		33		mV/A
Zero-current output voltage	VQVO	Ip=0A		Vcc/2		V
<i>Accuracy Performance</i>						
Sensitivity Error	ESens	@TA=25°C; VCC=3.3V	-1		1	%
Electrical Offset Error	VOE	Ip=0A, TA=25°C	-10	±5	10	mV
		Ip=0A, TA=-40°C ~125°C	-30	±15	30	mV
Linearity Error	LinERR	Of full rang	-1	0.5	1	%
Total Output Error	ETOT(HT)	Full scale of IP, TA=25°C~125°C	-2		2	%
	ETOT(HT)	Full scale of IP, TA=25°C~85°C	-1.5		1.5	%
	ETOT(LT)	Full scale of IP, TA=-40°C~25°C		±3		%

***040UR-3 Performance Characteristics**

Dc operating parameters at VCC = 3.3V, TA = -40°C ~125°C, unless otherwise specified

Parameter	Symbol	Condition	Min	Typ.	Max	Unit
<i>Nominal parameters</i>						
Current Sensing Range	IP		0		40	A
Sensitivity	SensTA	@VCC=3.3V		66		mV/A
Zero-current output voltage	VQVO	Ip=0A		Vcc/10		V
<i>Accuracy Performance</i>						
Sensitivity Error	ESens	@TA=25°C; VCC=3.3V	-1		1	%
Electrical Offset Error	VOE	Ip=0A, TA=25°C	-10	±5	10	mV
		Ip=0A, TA=-40°C ~125°C	-30	±15	30	mV
Linearity Error	LinERR	Of full rang	-1	0.5	1	%
Total Output Error	ETOT(HT)	Full scale of IP, TA=25°C~125°C	-2		2	%
	ETOT(HT)	Full scale of IP, TA=25°C~85°C	-1.5		1.5	%
	ETOT(LT)	Full scale of IP, TA=-40°C~25°C		±3		%

*065BR-3 Performance Characteristics

Dc operating parameters at VCC = 3.3V, TA=-40°C ~125°C, unless otherwise specified

Parameter	Symbol	Condition	Min	Typ.	Max	Unit
<i>Nominal parameters</i>						
Current Sensing Range	IP		-65		65	A
Sensitivity	SensTA	@VCC=3.3V		20.3		mV/A
Zero-current output voltage	VQVO	Ip=0A		Vcc/2		V
<i>Accuracy Performance</i>						
Sensitivity Error	ESens	@TA=25°C;VCC=3.3V	-1		1	%
Electrical Offset Error	VOE	Ip=0A, TA=25°C	-10	±5	10	mV
		Ip=0A, TA=-40°C ~125°C	-30	±15	30	mV
Linearity Error	LinERR	Of full rang	-1	0.5	1	%
Total Output Error	ETOT(HT)	Full scale of IP, TA=25°C~125°C	-2		2	%
	ETOT(HT)	Full scale of IP, TA=25°C~85°C	-1.5		1.5	%
	ETOT(LT)	Full scale of IP, TA=-40°C~25°C		±3		%

*065UR-3 Performance Characteristics

Dc operating parameters at VCC = 3.3V, TA=-40°C ~125°C, unless otherwise specified

Parameter	Symbol	Condition	Min	Typ.	Max	Unit
<i>Nominal parameters</i>						
Current Sensing Range	IP		0		65	A
Sensitivity	SensTA	@VCC=3.3V		40.6		mV/A
Zero-current output voltage	VQVO	Ip=0A		Vcc/10		V
<i>Accuracy Performance</i>						
Sensitivity Error	ESens	@TA=25°C;VCC=3.3V	-1		1	%
Electrical Offset Error	VOE	Ip=0A, TA=25°C	-10	±5	10	mV
		Ip=0A, TA=-40°C ~125°C	-30	±15	30	mV
Linearity Error	LinERR	Of full rang	-1	0.5	1	%
Total Output Error	ETOT(HT)	Full scale of IP, TA=25°C~125°C	-2		2	%
	ETOT(HT)	Full scale of IP, TA=25°C~85°C	-1.5		1.5	%
	ETOT(LT)	Full scale of IP, TA=-40°C~25°C		±3		%

***075BR-3 Performance Characteristics**

Dc operating parameters at $V_{CC} = 3.3V$, $T_A = -40^{\circ}C \sim 125^{\circ}C$, unless otherwise specified


Parameter	Symbol	Condition	Min	Typ.	Max	Unit
<i>Nominal parameters</i>						
Current Sensing Range	I_P		-75		75	A
Sensitivity	$Sens_{TA}$	@ $V_{CC}=3.3V$		17.6		mV/A
Zero-current output voltage	V_{QVO}	$I_P=0A$		$V_{CC}/2$		V
<i>Accuracy Performance</i>						
Sensitivity Error	E_{Sens}	@ $T_A=25^{\circ}C$; $V_{CC}=3.3V$	-2		2	%
Electrical Offset Error	V_{OE}	$I_P=0A$, $T_A=25^{\circ}C$	-10	± 5	10	mV
		$I_P=0A$, $T_A=-40^{\circ}C \sim 125^{\circ}C$	-30	± 15	30	mV
Linearity Error	Lin_{ERR}	Of full rang	-1.5	0.5	1.5	%
Total Output Error	$E_{TOT(HT)}$	Full scale of I_P , $T_A=25^{\circ}C \sim 125^{\circ}C$	-3		3	%
	$E_{TOT(HT)}$	Full scale of I_P , $T_A=25^{\circ}C \sim 85^{\circ}C$	-2		2	%
	$E_{TOT(LT)}$	Full scale of I_P , $T_A=-40^{\circ}C \sim 25^{\circ}C$		± 3		%

***075UR-3 Performance Characteristics**


Dc operating parameters at $V_{CC} = 3.3V$, $T_A = -40^{\circ}C \sim 125^{\circ}C$, unless otherwise specified

Parameter	Symbol	Condition	Min	Typ.	Max	Unit
<i>Nominal parameters</i>						
Current Sensing Range	I_P		0		75	A
Sensitivity	$Sens_{TA}$	@ $V_{CC}=3.3V$		35.2		mV/A
Zero-current output voltage	V_{QVO}	$I_P=0A$		$V_{CC}/10$		V
<i>Accuracy Performance</i>						
Sensitivity Error	E_{Sens}	@ $T_A=25^{\circ}C$; $V_{CC}=3.3V$	-2		2	%
Electrical Offset Error	V_{OE}	$I_P=0A$, $T_A=25^{\circ}C$	-10	± 5	10	mV
		$I_P=0A$, $T_A=-40^{\circ}C \sim 125^{\circ}C$	-30	± 15	30	mV
Linearity Error	Lin_{ERR}	Of full rang	-1.5	0.5	1.5	%
Total Output Error	$E_{TOT(HT)}$	Full scale of I_P , $T_A=25^{\circ}C \sim 125^{\circ}C$	-3		3	%
	$E_{TOT(HT)}$	Full scale of I_P , $T_A=25^{\circ}C \sim 85^{\circ}C$	-2		2	%
	$E_{TOT(LT)}$	Full scale of I_P , $T_A=-40^{\circ}C \sim 25^{\circ}C$		± 3		%

Package Dimension Drawing

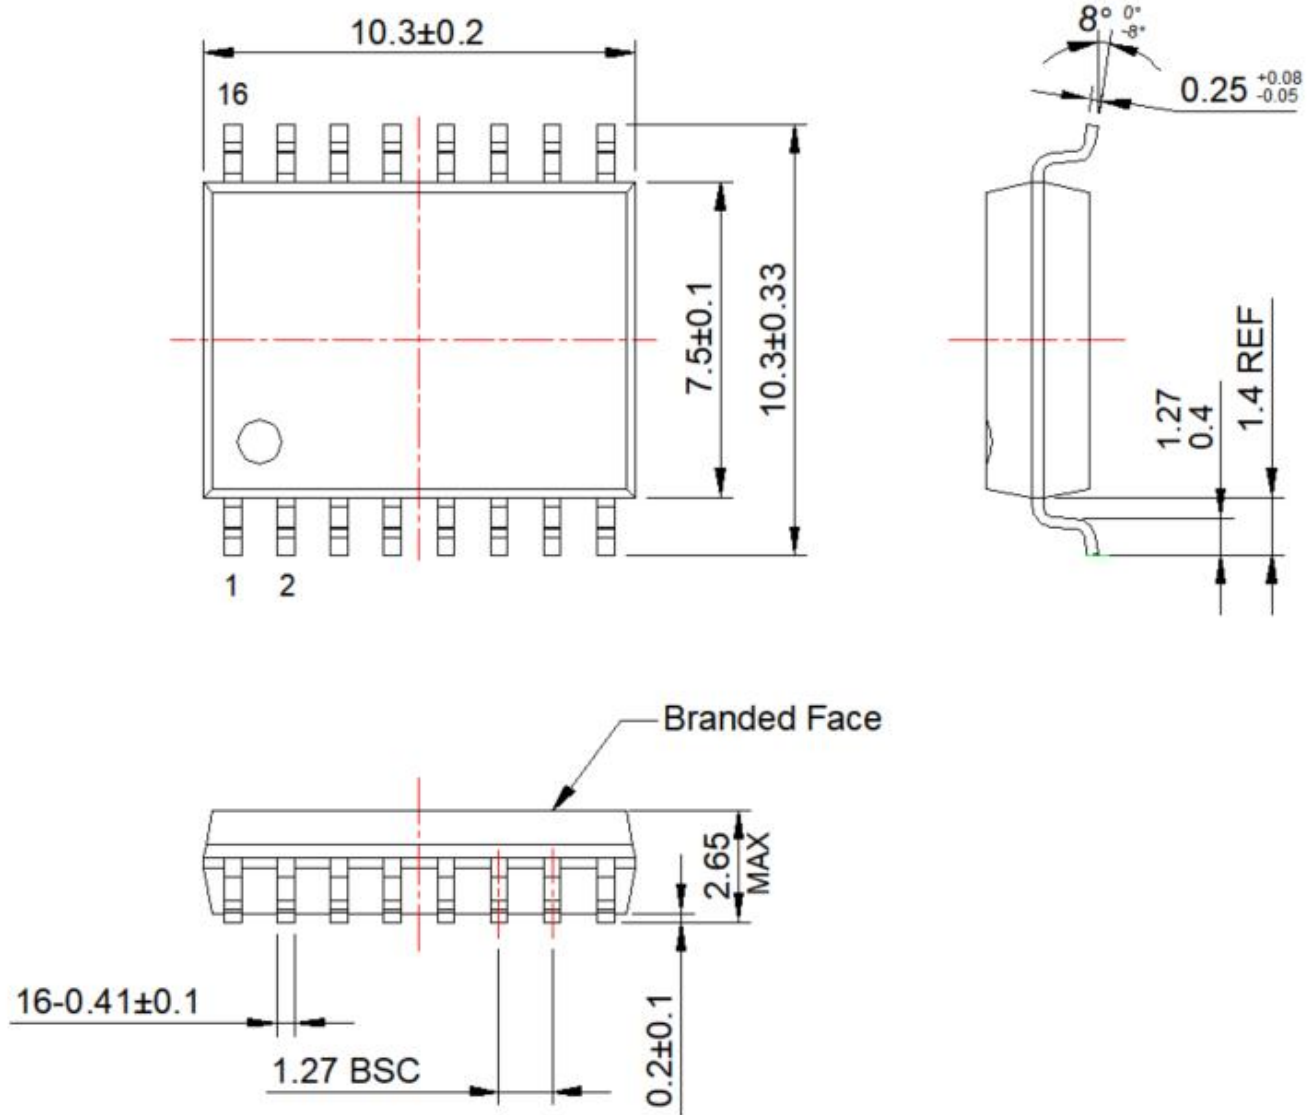

Marking

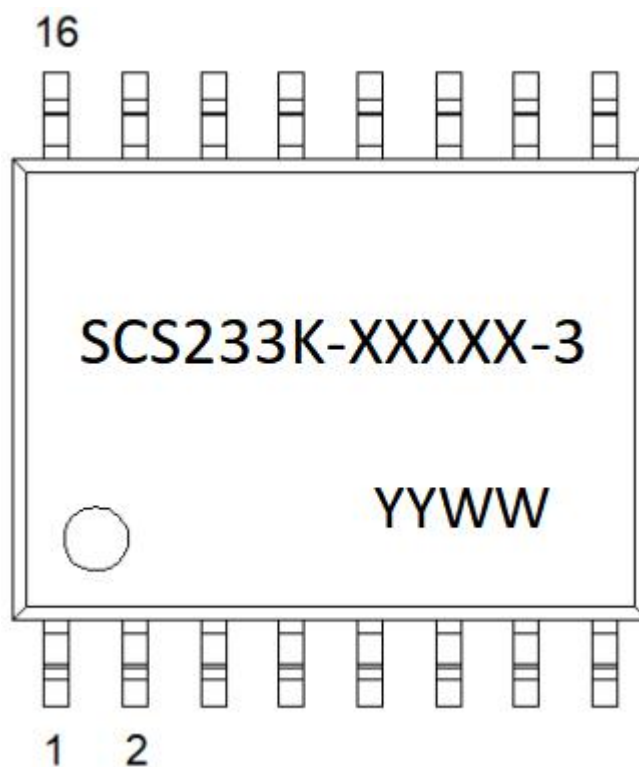

XXXXX stands for the specific model
YY stands for year
WW stands for week

Performances Parameters Definitions:

● **Quiescent Voltage Output:**

In the quiescent state (no significant magnetic field, B=0G), Current Sensor Output Voltage V_{QVO}

-xR: V_{QVO} has a constant ratio to the supply voltage; $V_{QVO} = V_{CC}/2$ or $V_{QVO} = V_{CC}/10$

● **Sensitivity(Sens):**

Sens is the slope of the reference output line ; $V_{OUT} = V_{QVO} + 1.32 \times I_P / I_{P_MAX}$ which refers to the following, the change of current, the change of output, its relationship with current is : **Sens = 1.32 / I_{P_MAX}**

● **Offset with Temperature:**

Due to internal component tolerances and thermal considerations, the Quiescent Voltage Output (QVO) may drift from its nominal value through the operating ambient temperature (TA).

● **Sensitivity with temperature:**

Due to the influence of internal temperature compensation coefficient, the sensitivity will change through the whole working temperature, and be different from the expected value at room temperature.

● **offset voltage:**



The zero offset voltage is the output voltage when the primary current is zero, with ideal value $V_{QVO} = V_{CC}/2$ (or $V_{CC}/10$). The difference between V_{QVO} and ideal value is named Total offset voltage error. This offset error can be attributed to the zero-point offset voltage (due to the ASIC internal QVO adjusted resolution)、temperature drift.

● **Response Time:**

The time between the primary current signals (IPN) reaches 90% of its final value and when the sensor output signal reaches 90%. See figure1.

● **rise time:**

The time between when the sensor output reaches 10% of its final value, and when it reaches 90% of its final value.

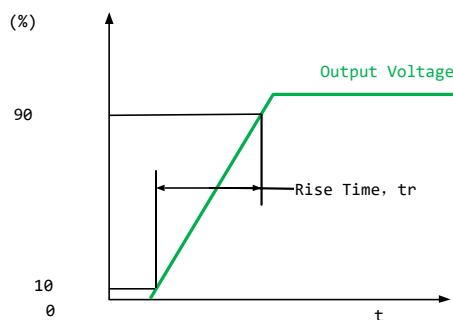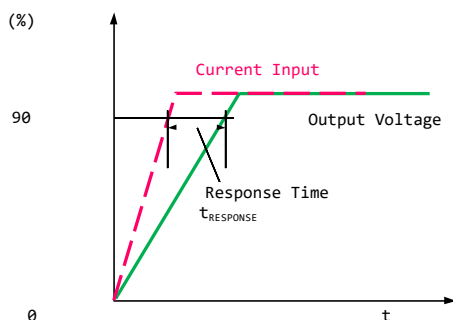

- **QVO Ratiometricity error:**


When the supply voltage VCC changes from 3.3V to $3.14 < V_{CC1} < 3.46V$, the deviation between the sensor zero output and the theoretical value, the formula is defined as follows:

$$Er = V_{QVO(V_{CC1})} - V_{QVO(3.3V)} \times (V_{CC1} / 3.3)$$

- **Linearity:**

The maximum Positive and Negative error comparing with ideal output line

(-BR mode: $V_{out} = V_{CC}/2 + 1.32 \times I_P / I_{P(MAX)}$),

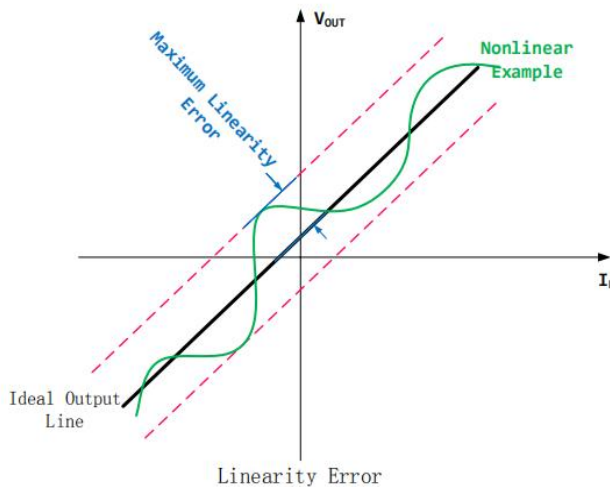

- **Total Output Error E_{TOT} :**

Error between the device measurement current and Applied current (I_P), which is defined as the difference between the ideal output voltage and the actual output voltage divided by the ideal sensitivity:

$$E_{TOT(I_P)} = \frac{V_{I_{OUT}(I_P)} - V_{I_{OUT}(ideal)(I_P)}}{Sens_{(ideal)} \times I_P}$$

$$V_{I_{OUT}(ideal)(I_P)} = V_{I_{OUT}(0)} + (Sens_{(ideal)} \times I_P)$$

At relatively high currents, E_{TOT} is mainly due to sensitivity errors; while at relatively low currents, E_{TOT} is mainly due to offset voltage errors (V_{OE}).

Actually, when the I_P approaches zero, the E_{TOT} approaches infinity due to offset voltage error.

Important notes :

1. Wrong wiring may cause sensor damage. After the sensor is connected to the 3.3V power supply, the measured current passes through the direction of the sensor current terminal, and the corresponding voltage value can be measured at the output end.
2. -BR: V_{OUT} is proportional to V_{CC} , $V_{OUT} = V_{CC}/2 + 1.32 \times I_P/I_{P(MAX)}$
 Supply voltage change will cause V_{OUT} change by ratio.
 For example: V_{CC} range 3.14V~3.46V; V_{QV0} output range at 1.57V~1.73V 。
 $V_{OUT(IPMAX)}$ output range at 2.826V~3.114V.

Version History:

Version No.	Date of change	remarks
V1	2023/3/20	First edition
V1.2	2023/7/6	Modify some parameters
V1.3	2023/08/09	Add marking information
V1.4	2023/09/04	Updated accuracy error information for *075BR-3 and *075UR-3 specifications
V1.5	2023/10/12	Increase compliance AECQ100
V1.6	2023/12/8	Updated the minimum and maximum values of the General Electric parameter Vcc
V1.7	2024/01/26	Modify some parameters (pull-up resistor, response time) and increase the internal resistance
V1.8	2024/03/28	Update MPQ
V1.9	2024/04/10	Fixed some errors