


The SCS series of current sensors is suitable for all markets, including automotive, industrial, commercial, and communication system applications, and the current sensing of AC and DC provides a smaller, more cost-effective solution with multiple output modes.

Features and Benefits:


- Open-loop current sensor using Hall effect IC
- Single 3.3V supply
- Support unidirectional, bidirectional output
- Analog signal output
- Current detection range: $\pm 10A - \pm 50A$
- Operating temperature range: $-40^{\circ}C$ to $+125^{\circ}C$
- QVO (Zero current output):
 $-xR$: QVO ratiometric to supply voltage V_{CC} ,
 Fixed Gain $V_{QVO}=V_{CC}/2$ or $V_{CC}/10$
- Differential Hall sensor, good accuracy, linearity and temperature drift
- Low internal resistance can effectively control heat consumption and power consumption



Applications:


- EV/HEV motor controller
- frequency converters
- DC/DC

Pin Definition:

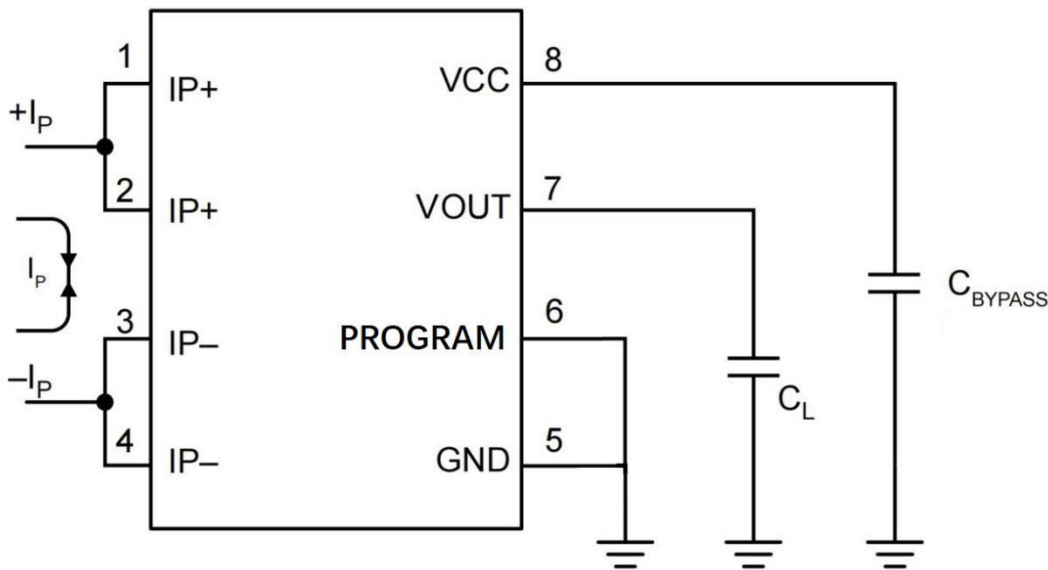

**Vcc BYPASS capacitor must be close to device Vcc pin*
**Vout BYPASS capacitor must be close to device Vout pin*

Naming rules:

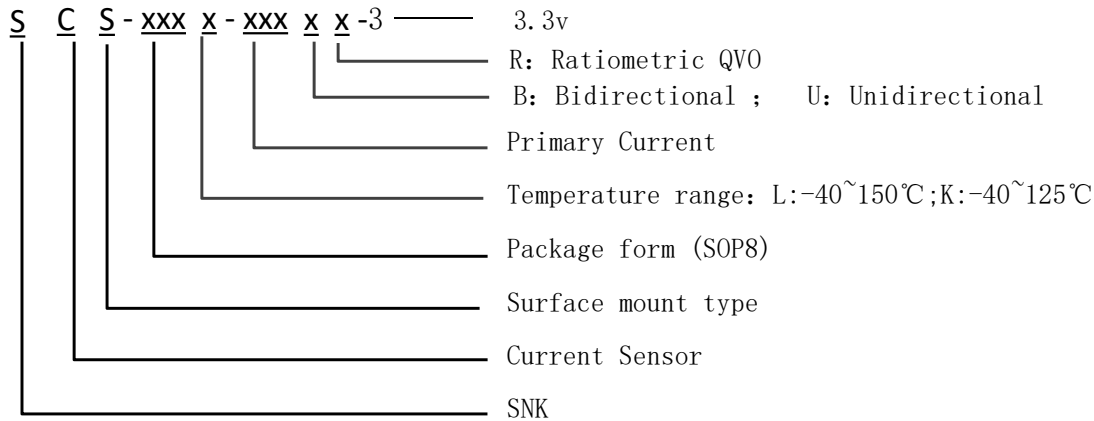

Ordering Information:

Part number	QVO V _{OUT} (Q) (V)	Primary Current I _p (A)	Sensitivity Sens _(Typ.) (mV/A)	T _A (°C)	MPQ (PCS)
SCS108K-010BR-3	V _{cc} /2	±10	132	-40~125	1000
SCS108K-020BR-3	V _{cc} /2	±20	66	-40~125	1000
SCS108K-020UR-3	V _{cc} /10	20	132		1000
SCS108K-030BR-3	V _{cc} /2	±30	44	-40~125	1000
SCS108K-030UR-3	V _{cc} /10	30	88		1000
SCS108K-050BR-3	V _{cc} /2	±50	26.4	-40~125	1000
SCS108K-050UR-3	V _{cc} /10	50	52.8		1000

**Please contact factory for currents other than standard current specifications*

Absolute Maximum Ratings

Characteristic	Symbol	Rating	Unit
Supply Voltage	V_{CC}	-0.3 to 4.6	V
Supply Current	I_{CC}	20	mA
Output Voltage/ Reference voltage	V_{OUT}	0.15 to $V_{CC}-0.15$	V
Output Current	T_A	-40 to 125	°C
Operating Temperature	T_J	165	°C
Max Junction Temperature	T_S	-55 to 150	°C

Common Operating Characteristics

Dc operating parameters at $V_{CC} = 3.3V$ (unless otherwise stated), T_A within the specified temperature range.


Parameter	Symbol	Condition	Min	Typ.	Max	Unit	
Supply Voltage	V_{CC}		3.0	3.3	3.6	V	
Supply Current	I_{CC}	$R_L \geq 10K\Omega$		16		mA	
Power on Delay	T_{PO}	$T_A=25^\circ C$			1000	μs	
QVO Ratiometric Error (-R)	E_r		-0.3		0.3	%	
Zero Current Output Voltage	V_{QVO}	SCS108K-xxxBR-3	$T_A = 25^\circ C$		$V_{CC}/2$		V
		SCS108K-xxxUR-3			$V_{CC}/10$		
Output voltage Range @ I_P	$V_{OUT}-V_{QVO}$	SCS108K-xxxBR-3			± 1.32		
		SCS108K-xxxUR-3			2.64		
Output Load Resistance	R_L	V_{OUT} to V_{CC} or GND	5			$K\Omega$	
Output Load Capacitance	C_L	V_{OUT} TO GND			10	nF	
Response Time	$t_{RESPONSE}$	$T_A=25^\circ C$, $C_L=1nF$, I_P step=50% of I_{P+} , 90% input to 90% output		0.8		μs	
Internal Bandwidth	BW	Small signal -3dB, $C_L=1nF$, $T_A=25^\circ C$		600		KHz	
DC Output Impedance	R_{OUT}	$T_A = 25^\circ C$			20	$K\Omega$	

ISOLATION CHARACTERISTICS

Characteristic	Symbol	Notes	Rating	Unit
Dielectric Strength Test Voltage	V_{ISO}	Agency type-tested for 60 seconds per UL standard 60950-1, 2nd Edition	2400	VAC
Working Voltage for Basic Isolation	V_{WVBI}	According to UL Standard 60950-1 2nd Edition, Basic (Single) Isolation	420	VDC or V_{pk}
			297	V_{rms}
Electrical distance	DCL	Minimum distance from IP pin to signal pin (air)	4.2	mm
Creepage distance	DCR	Minimum distance from IP pin to signal pin (plastic body)	4.2	mm

*1: 60-second test is only for UL test; Tested in production against UL60950-1 2nd Edition

Pin diagram

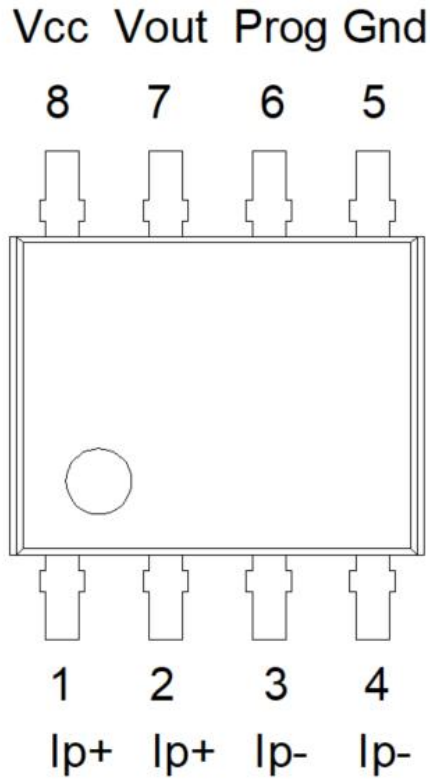

Pin number	name	description
1, 2	Ip+	Positive terminals for current being sensed(enter)
3, 4	Ip-	Negative terminals for current being sensed(out)
5	Gnd	Ground terminal
6	Prog	Factory calibrated feet (grounded recommended)
7	Vout	Analog output
8	Vcc	Power supply terminal

SCS108K-010BR-3 Performance Characteristics

Dc operating parameters at $V_{CC} = 3.3V$, $T_A = -40^{\circ}C \sim 125^{\circ}C$, unless otherwise specified

Parameter	Symbol	Condition	Min	Typ.	Max	Unit
<i>Nominal parameters</i>						
Current Sensing Range	I_p		-10		10	A
Sensitivity	$Sens_{TA}$	@ $V_{CC}=3.3V$		132		mV/A
Zero-current output voltage	V_{QVO}	$I_p=0A$		$V_{CC}/2$		V
<i>Accuracy Performance</i>						
Sensitivity Error	E_{Sens}	@ $T_A=25^{\circ}C; V_{CC}=3.3V$	-1		1	%
Electrical Offset Error	V_{OE}	$I_p=0A, T_A=25^{\circ}C$	-10	± 5	10	mV
		$I_p=0A, T_A=-40^{\circ}C \sim 125^{\circ}C$	-30	± 15	30	mV
Linearity Error	Lin_{ERR}	Of full rang	-1	0.5	1	%
Total Output Error	$E_{TOT(HT)}$	Full scale of $I_p, T_A=25^{\circ}C \sim 125^{\circ}C$	-2		2	%
	$E_{TOT(HT)}$	Full scale of $I_p, T_A=25^{\circ}C \sim 85^{\circ}C$	-1.5		1.5	%
	$E_{TOT(LT)}$	Full scale of $I_p, T_A=-40^{\circ}C \sim 25^{\circ}C$		± 3		%

SCS108K-020BR-3 Performance Characteristics

Dc operating parameters at VCC = 3.3V, TA = -40°C ~ 125°C, unless otherwise specified

Parameter	Symbol	Condition	Min	Typ.	Max	Unit
<i>Nominal parameters</i>						
Current Sensing Range	IP		-20		20	A
Sensitivity	SensTA	@VCC=3.3V		66		mV/A
Zero-current output voltage	VQVO	Ip=0A		Vcc/2		V
<i>Accuracy Performance</i>						
Sensitivity Error	ESens	@TA=25°C; VCC=3.3V	-1		1	%
Electrical Offset Error	VOE	Ip=0A, TA=25°C	-10	±5	10	mV
		Ip=0A, TA=-40°C ~ 125°C	-30	±15	30	mV
Linearity Error	LinERR	Of full rang	-1	0.5	1	%
Total Output Error	ETOT(HT)	Full scale of IP, TA=25°C~125°C	-2		2	%
	ETOT(HT)	Full scale of IP, TA=25°C~85°C	-1.5		1.5	%
	ETOT(LT)	Full scale of IP, TA=-40°C~25°C		±3		%

SCS108K-020UR-3 Performance Characteristics

Dc operating parameters at VCC = 3.3V, TA = -40°C ~ 125°C, unless otherwise specified

Parameter	Symbol	Condition	Min	Typ.	Max	Unit
<i>Nominal parameters</i>						
Current Sensing Range	IP		0		20	A
Sensitivity	SensTA	@VCC=3.3V		132		mV/A
Zero-current output voltage	VQVO	Ip=0A		Vcc/10		V
<i>Accuracy Performance</i>						
Sensitivity Error	ESens	@TA=25°C; VCC=3.3V	-1		1	%
Electrical Offset Error	VOE	Ip=0A, TA=25°C	-10	±5	10	mV
		Ip=0A, TA=-40°C ~ 125°C	-30	±15	30	mV
Linearity Error	LinERR	Of full rang	-1	0.5	1	%
Total Output Error	ETOT(HT)	Full scale of IP, TA=25°C~125°C	-2		2	%
	ETOT(HT)	Full scale of IP, TA=25°C~85°C	-1.5		1.5	%
	ETOT(LT)	Full scale of IP, TA=-40°C~25°C		±3		%

SCS108K-030BR-3 Performance Characteristics

Dc operating parameters at $V_{CC} = 3.3V$, $T_A = -40^{\circ}C \sim 125^{\circ}C$, unless otherwise specified

Parameter	Symbol	Condition	Min	Typ.	Max	Unit
<i>Nominal parameters</i>						
Current Sensing Range	I_P		-30		30	A
Sensitivity	$Sens_{TA}$	@ $V_{CC}=3.3V$		44		mV/A
Zero-current output voltage	V_{QVO}	$I_P=0A$		$V_{CC}/2$		V
<i>Accuracy Performance</i>						
Sensitivity Error	E_{Sens}	@ $T_A=25^{\circ}C; V_{CC}=3.3V$	-1		1	%
Electrical Offset Error	V_{OE}	$I_P=0A, T_A=25^{\circ}C$	-10	± 5	10	mV
		$I_P=0A, T_A=-40^{\circ}C \sim 125^{\circ}C$	-30	± 15	30	mV
Linearity Error	Lin_{ERR}	Of full rang	-1	0.5	1	%
Total Output Error	$E_{TOT(HT)}$	Full scale of $I_P, T_A=25^{\circ}C \sim 125^{\circ}C$	-2		2	%
	$E_{TOT(HT)}$	Full scale of $I_P, T_A=25^{\circ}C \sim 85^{\circ}C$	-1.5		1.5	%
	$E_{TOT(LT)}$	Full scale of $I_P, T_A=-40^{\circ}C \sim 25^{\circ}C$		± 3		%

SCS108K-030UR-3 Performance Characteristics

Dc operating parameters at $V_{CC} = 3.3V$, $T_A = -40^{\circ}C \sim 125^{\circ}C$, unless otherwise specified

Parameter	Symbol	Condition	Min	Typ.	Max	Unit
<i>Nominal parameters</i>						
Current Sensing Range	I_P		0		30	A
Sensitivity	$Sens_{TA}$	@ $V_{CC}=3.3V$		88		mV/A
Zero-current output voltage	V_{QVO}	$I_P=0A$		$V_{CC}/10$		V
<i>Accuracy Performance</i>						
Sensitivity Error	E_{Sens}	@ $T_A=25^{\circ}C; V_{CC}=3.3V$	-1		1	%
Electrical Offset Error	V_{OE}	$I_P=0A, T_A=25^{\circ}C$	-10	± 5	10	mV
		$I_P=0A, T_A=-40^{\circ}C \sim 125^{\circ}C$	-30	± 15	30	mV
Linearity Error	Lin_{ERR}	Of full rang	-1	0.5	1	%
Total Output Error	$E_{TOT(HT)}$	Full scale of $I_P, T_A=25^{\circ}C \sim 125^{\circ}C$	-2		2	%
	$E_{TOT(HT)}$	Full scale of $I_P, T_A=25^{\circ}C \sim 85^{\circ}C$	-1.5		1.5	%
	$E_{TOT(LT)}$	Full scale of $I_P, T_A=-40^{\circ}C \sim 25^{\circ}C$		± 3		%

SCS108K-050BR-3 Performance Characteristics

Dc operating parameters at $V_{CC} = 3.3V$, $T_A = -40^{\circ}C \sim 125^{\circ}C$, unless otherwise specified




Parameter	Symbol	Condition	Min	Typ.	Max	Unit
<i>Nominal parameters</i>						
Current Sensing Range	I_P		-50		50	A
Sensitivity	$Sens_{TA}$	@ $V_{CC}=5.0V$		26.4		mV/A
Zero-current output voltage	V_{QVO}	$I_P=0A$		$V_{CC}/2$		V
<i>Accuracy Performance</i>						
Sensitivity Error	E_{Sens}	@ $T_A=25^{\circ}C; V_{CC}=3.3V$	-1		1	%
Electrical Offset Error	V_{OE}	$I_P=0A, T_A=25^{\circ}C$	-10	± 5	10	mV
		$I_P=0A, T_A=-40^{\circ}C \sim 125^{\circ}C$	-30	± 15	30	mV
Linearity Error	Lin_{ERR}	Of full rang	-1	0.5	1	%
Total Output Error	$E_{TOT(HT)}$	Full scale of $I_P, T_A=25^{\circ}C \sim 125^{\circ}C$	-2		2	%
	$E_{TOT(HT)}$	Full scale of $I_P, T_A=25^{\circ}C \sim 85^{\circ}C$	-1.5		1.5	%
	$E_{TOT(LT)}$	Full scale of $I_P, T_A=-40^{\circ}C \sim 25^{\circ}C$		± 3		%

SCS108K-050UR-3 Performance Characteristics

Dc operating parameters at $V_{CC} = 3.3V$, $T_A = -40^{\circ}C \sim 125^{\circ}C$, unless otherwise specified

Parameter	Symbol	Condition	Min	Typ.	Max	Unit
<i>Nominal parameters</i>						
Current Sensing Range	I_P		0		50	A
Sensitivity	$Sens_{TA}$	@ $V_{CC}=3.3V$		52.8		mV/A
Zero-current output voltage	V_{QVO}	$I_P=0A$		$V_{CC}/10$		V
<i>Accuracy Performance</i>						
Sensitivity Error	E_{Sens}	@ $T_A=25^{\circ}C; V_{CC}=3.3V$	-1		1	%
Electrical Offset Error	V_{OE}	$I_P=0A, T_A=25^{\circ}C$	-10	± 5	10	mV
		$I_P=0A, T_A=-40^{\circ}C \sim 125^{\circ}C$	-30	± 15	30	mV
Linearity Error	Lin_{ERR}	Of full rang	-1	0.5	1	%
Total Output Error	$E_{TOT(HT)}$	Full scale of $I_P, T_A=25^{\circ}C \sim 125^{\circ}C$	-2		2	%
	$E_{TOT(HT)}$	Full scale of $I_P, T_A=25^{\circ}C \sim 85^{\circ}C$	-1.5		1.5	%
	$E_{TOT(LT)}$	Full scale of $I_P, T_A=-40^{\circ}C \sim 25^{\circ}C$		± 3		%


Package Dimension Drawing

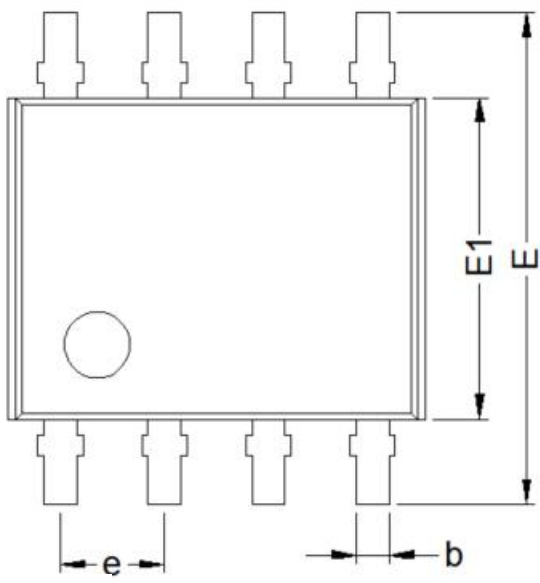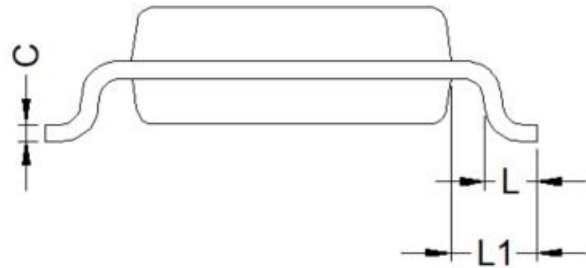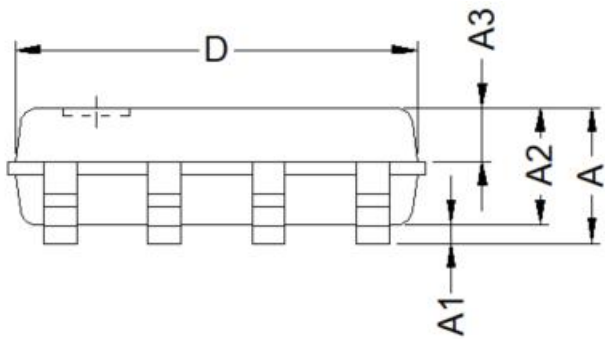

PIN1

SYMBOL	MILLIMETER		
	MIN	NOM	MAX
A	--	--	1.65
A1	0.10	--	0.25
A2	1.40	1.42	1.50
A3	0.60	0.65	0.70
b	0.33	--	0.47
c	0.20	--	0.24
D	4.80	4.90	5.00
E	5.90	6.00	6.20
E1	3.85	3.90	4.00
e	1.27 (BSC)		
L	0.50	0.60	0.70
L1	1.05 (BSC)		

Marking

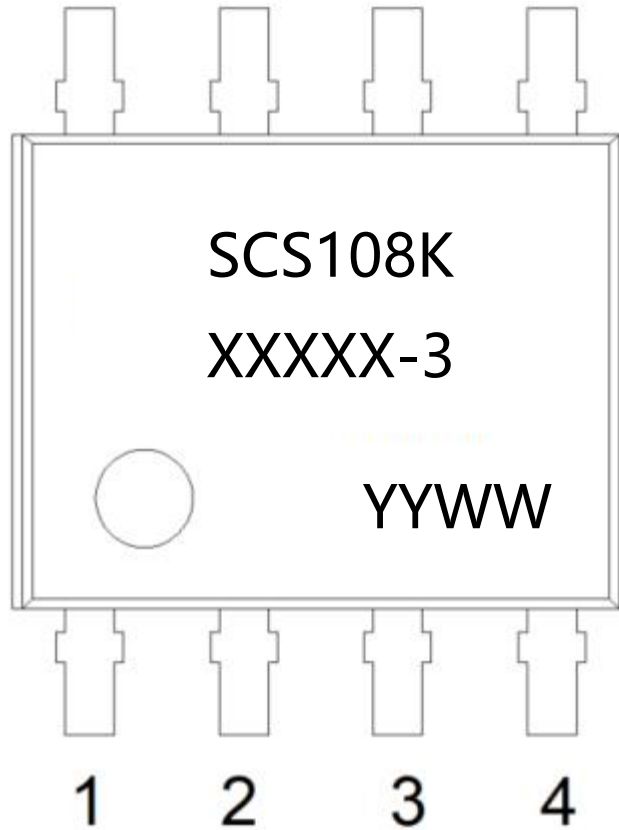

XXXXX stands for the specific model
YY stands for year
WW stands for week

Performances Parameters Definitions:

● Quiescent Voltage Output:

In the quiescent state (no significant magnetic field, $B=0G$), Current Sensor Output Voltage V_{QVO}

-XR: V_{QVO} has a constant ratio to the supply voltage; $V_{QVO} = V_{CC}/2$ or $V_{CC}/10$

● Sensitivity(Sens):

Sens is the slope of the reference output line ; $V_{OUT} = V_{QVO} + 1.32 \times I_P / I_{P_MAX}$ which refers to the following, the change of current, the change of output, its relationship with current is : $Sens = 1.32 / I_{P_MAX}$

● Offset with Temperature:

Due to internal component tolerances and thermal considerations, the Quiescent Voltage Output (QVO) may drift from its nominal value through the operating ambient temperature (TA).

● Sensitivity with temperature:

Due to the influence of internal temperature compensation coefficient, the sensitivity will change through the whole working temperature, and be different from the expected value at room temperature.

● offset voltage:



The zero offset voltage is the output voltage when the primary current is zero, with ideal value $V_{QVO} = V_{CC}/2$ (or $V_{CC}/10$). The difference between V_{QVO} and ideal value is named Total offset voltage error. This offset error can be attributed to the zero-point offset voltage (due to the ASIC internal QVO adjusted resolution)、temperature drift.

● Response Time:

The time between the primary current signals (IPN) reaches 90% of its final value and when the sensor output signal reaches 90%. See figure1.

● rise time:

The time between when the sensor output reaches 10% of its final value, and when it reaches 90% of its final value.

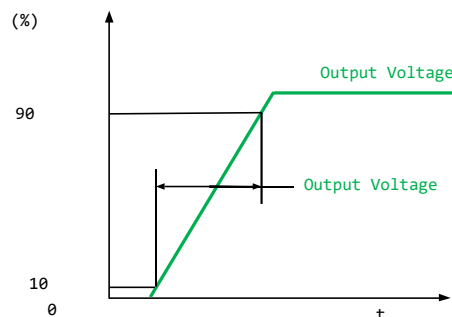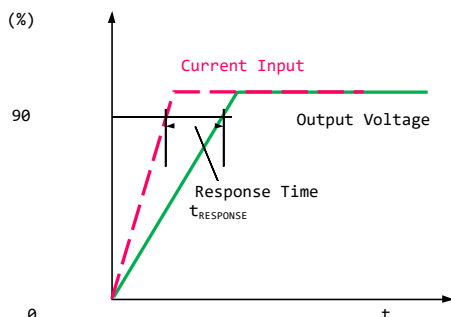

● **QVO Ratiometricity error:**


When the supply voltage VCC changes from 3.3V to $3.15 < V_{CC1} < 3.45V$, the deviation between the sensor zero output and the theoretical value, the formula is defined as follows:

$$E_r = \frac{(V_{QVO(V_{CC1})})}{V_{QVO(3.3V)} - V_{CC1}/3.3} \times 100\%$$

● **Linearity:**

The maximum Positive and Negative error comparing with ideal output line

(-BR mode: $V_{out} = V_{CC}/2 + 1.32 \times I_P / I_{P(MAX)}$),

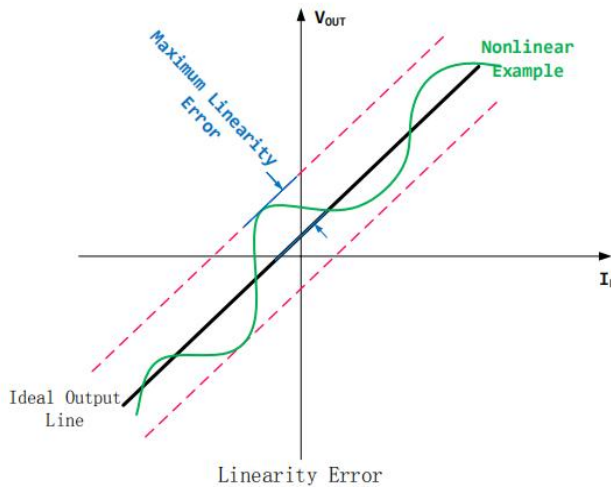

● **Total Output Error E_{TOT}:**

Error between the device measurement current and Applied current (I_p), which is defined as the difference between the ideal output voltage and the actual output voltage divided by the ideal sensitivity:

$$E_{TOT(I_P)} = \frac{V_{I_{OUT}(I_P)} - V_{I_{OUT}(ideal)(I_P)}}{Sens_{(ideal)} \times I_P}$$

$$V_{I_{OUT}(ideal)(I_P)} = V_{I_{OUT}(Q)} + (Sens_{(ideal)} \times I_P)$$

At relatively high currents, E_{TOT} is mainly due to sensitivity errors; while at relatively low currents, E_{TOT} is mainly due to offset voltage errors (V_{OE}).

Actually, when the I_p approaches zero, the E_{TOT} approaches infinity due to offset voltage error.

Important notes :

1. Wrong wiring may cause sensor damage. After the sensor is connected to the 3.3V power supply, the measured current passes through the direction of the sensor current terminal, and the corresponding voltage value can be measured at the output end.
2. -BR: V_{OUT} is proportional to V_{CC} , $V_{OUT} = V_{CC}/2 + 1.32 \times I_P / I_{P(MAX)}$,
Supply voltage change will cause V_{OUT} change by ratio.

For example: V_{CC} range 3.15V~3.45V; V_{QVO} output range at 1.575V~1.725V 。 $V_{OUT(IPMAX)}$ output range at 2.895V~3.045V.

Version History:

Version No.	Date of change	remarks
V1.0	2023/10/11	First edition
V1.1	2024/01/09	Fixed some errors